


室内灯具光度数据

实测参数: U:220.0V I:0.1786A P:20.55W PF:0.5229 Freq:50.00Hz 实检光通:3721.18x1 lm		
灯具名称: 600X600-20W	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

光源数据		光度数据				光效: 181.09 lm/W
型号		峰值光强 (cd)	1244	S/MH (C0/180)	1.28	
标称功率 (W)		灯具效率 (%)	100.0	S/MH (C90/270)	1.28	
额定电源电压 (V)	220	总光通量 (lm)	3721.2	η UP, DN (C0-180)	0.5, 49.2	
额定光通量 (lm)	3721.18	CIE分类	直接	η UP, DN (C180-360)	0.5, 49.8	
灯具内光源数 (只)	1	上射光通比 (%)	1.0	CIBSE SHR NOM	1.25	
实测电源电压 (V)	220	下射光通比 (%)	99.0	CIBSE SHR MAX	1.35	

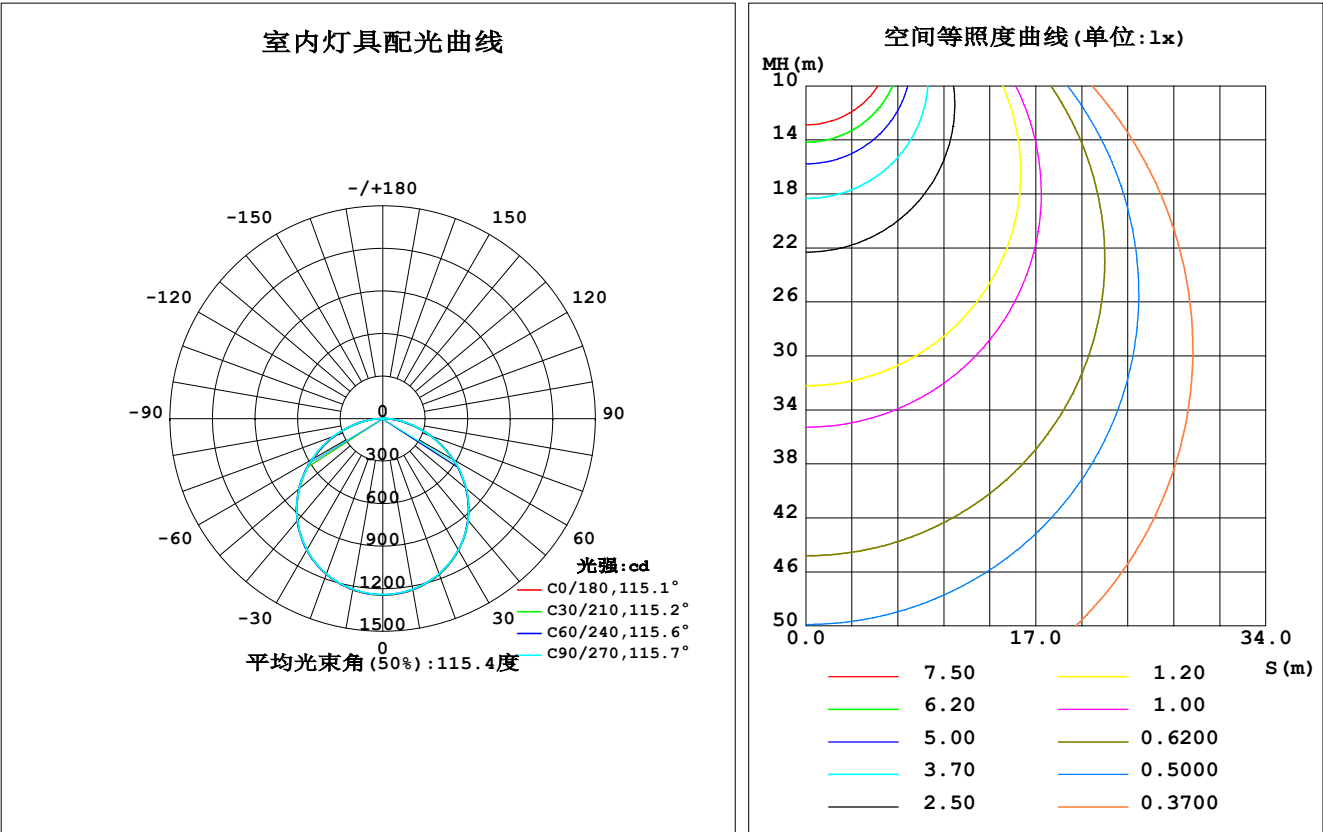

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2023-11-10

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.354
环境湿度: 65.0%
测试距离: 11.227米 [K=1.0000]
备注:

灯具环带光通量

环带光通量:

γ	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma(^{\circ})$	Φ 环	Φ 总	%lum, lamp
10	1226	1223	1221	1219	1225	1223	1222	1223	0- 10	117.6	117.6	3.16, 3.16
20	1168	1166	1164	1159	1168	1166	1166	1168	10- 20	338.5	456.1	12.3, 12.3
30	1071	1069	1068	1062	1071	1071	1070	1074	20- 30	517.3	973.3	26.2, 26.2
40	935.8	935.0	935.0	926.2	937.2	937.4	937.1	941.9	30- 40	629.9	1603	43.1, 43.1
50	767.0	766.8	768.7	757.5	769.5	770.4	770.9	775.6	40- 50	659.8	2263	60.8, 60.8
60	571.2	572.5	576.4	560.8	575.3	576.9	578.4	582.7	50- 60	601.9	2865	77, 77
70	362.8	361.8	363.7	352.7	359.8	366.1	372.8	372.3	60- 70	462.8	3328	89.4, 89.4
80	158.6	160.3	165.8	151.7	161.1	163.8	168.0	170.2	70- 80	275.4	3603	96.8, 96.8
90	4.303	5.062	4.882	3.218	5.594	7.184	6.097	8.783	80- 90	82.65	3686	99, 99
100	2.980	3.013	2.983	3.040	3.091	3.176	3.116	3.104	90-100	3.021	3689	99.1, 99.1
110	4.200	4.260	4.238	4.269	4.401	4.441	4.435	4.391	100-110	3.910	3693	99.2, 99.2
120	5.356	5.371	5.386	5.394	5.603	5.629	5.664	5.588	110-120	4.873	3698	99.4, 99.4
130	6.458	6.469	6.479	6.473	6.750	6.713	6.775	6.672	120-130	5.424	3703	99.5, 99.5
140	7.461	7.427	7.446	7.426	7.699	7.653	7.697	7.644	130-140	5.489	3708	99.7, 99.7
150	8.329	8.308	8.331	8.307	8.503	8.489	8.492	8.484	140-150	5.004	3713	99.8, 99.8
160	9.206	9.166	9.162	9.161	9.397	9.342	9.314	9.306	150-160	4.076	3718	99.9, 99.9
170	9.892	9.807	9.803	9.834	10.07	10.00	9.956	9.952	160-170	2.711	3720	100, 100
180	10.17	10.07	10.06	10.06	10.18	10.09	10.06	10.07	170-180	0.9556	3721	100, 100
单位:°	光强:cd									单位:lm		

锥面光通量(90度): 1934.9 lm

%lum = 52.0%

%lamp = 52.0%

锥面光通量(120度): 2864.9 lm

%lum = 77.0%


%lamp = 77.0%

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2023-11-10

γ 角度范围: 0度 - 180度
 γ 角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.354
环境湿度: 65.0%
测试距离: 11.227米 [K=1.0000]
备注:

灯具亮度限制曲线

实测参数: U:220.0V I:0.1786A P:20.55W PF:0.5229 Freq:50.00Hz 实检光通:3721.18x1 lm		
灯具名称: 600X600-20W	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

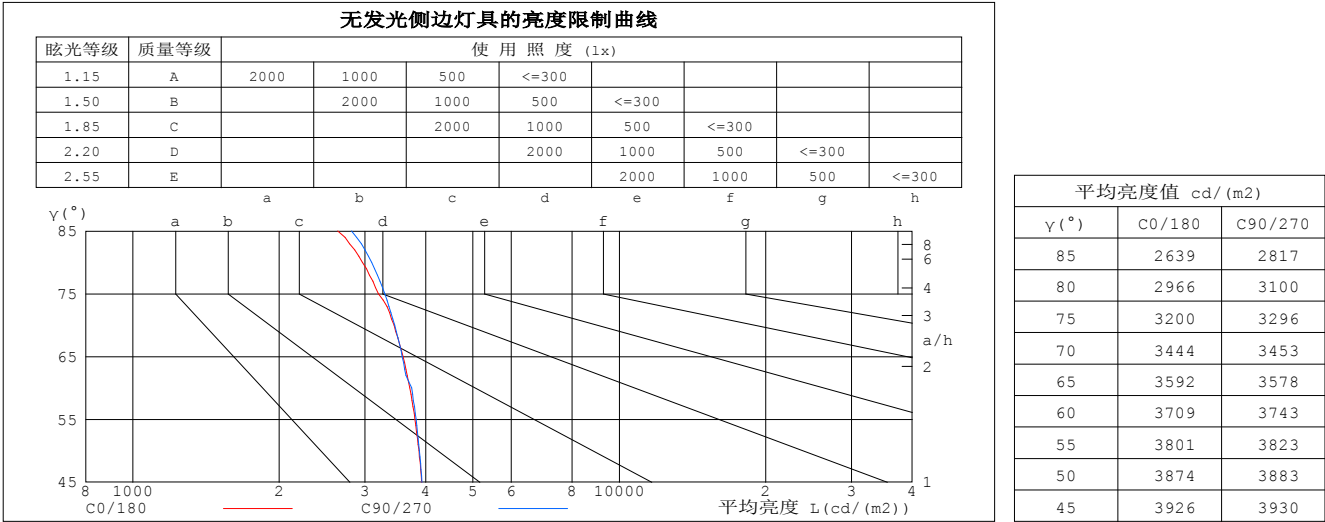


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2023-11-10

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.354
环境湿度:65.0%
测试距离:11.227米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:220.0V I:0.1786A P:20.55W PF:0.5229 Freq:50.00Hz 实检光通:3721.18x1 lm		
灯具名称: 600X600-20W	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.03	.99	.95	1.01	.97	.93	.96	.93	.90	.92	.90	.87	.89	.86	.84	.82
2.0	.90	.83	.77	.88	.81	.76	.84	.79	.74	.81	.76	.72	.77	.74	.70	.68
3.0	.79	.70	.64	.77	.69	.63	.74	.67	.62	.71	.65	.61	.68	.63	.59	.57
4.0	.70	.61	.54	.68	.60	.53	.65	.58	.52	.63	.57	.52	.61	.55	.51	.49
5.0	.62	.53	.46	.61	.52	.46	.59	.51	.45	.56	.50	.45	.54	.49	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.39	.51	.44	.39	.49	.43	.39	.37
7.0	.50	.42	.35	.50	.41	.35	.48	.40	.35	.46	.40	.35	.45	.39	.34	.32
8.0	.46	.37	.31	.45	.37	.31	.44	.36	.31	.43	.36	.31	.41	.35	.31	.29
9.0	.42	.34	.28	.42	.34	.28	.40	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.38	.31	.26	.37	.30	.25	.36	.30	.25	.35	.29	.25	.23

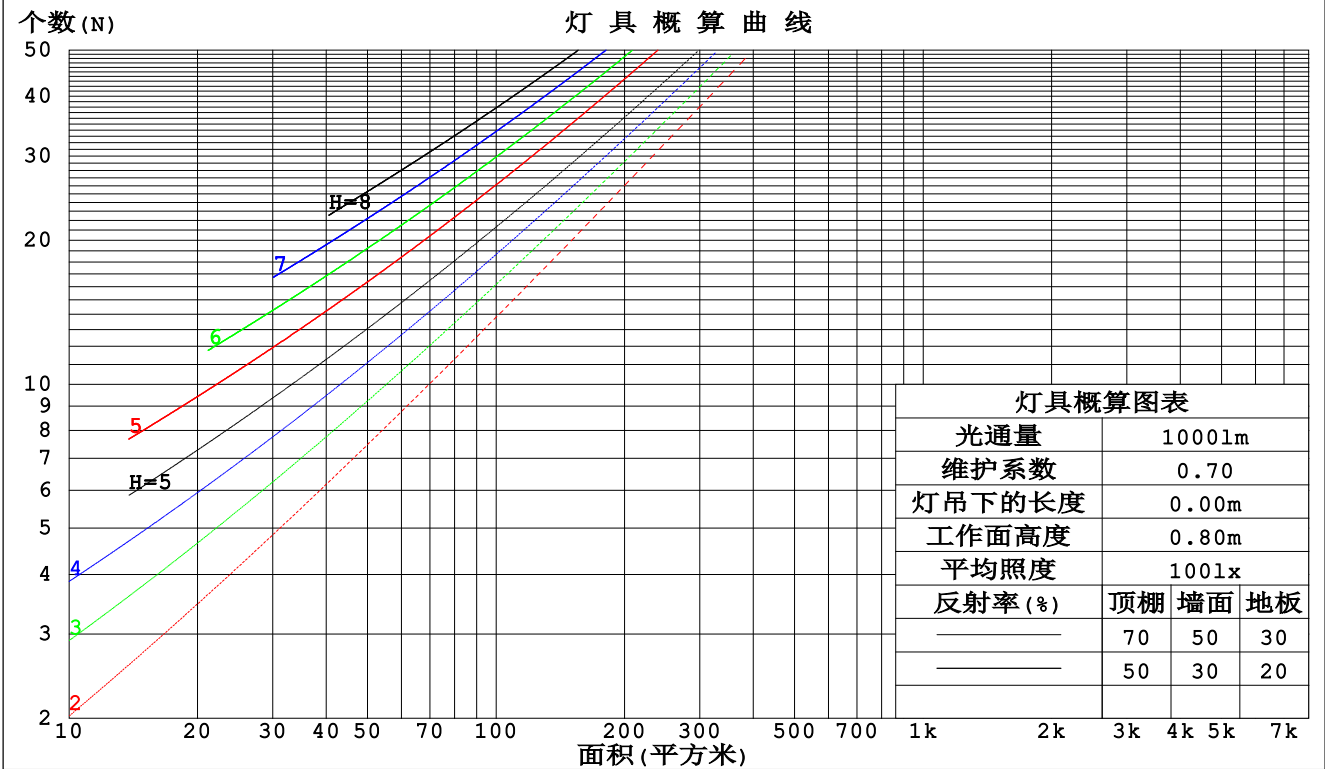

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2023-11-10

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.354
环境湿度: 65.0%
测试距离: 11.227米 [K=1.0000]
备注:

墙面和天花板利用系数

实测参数: U:220.0V I:0.1786A P:20.55W PF:0.5229 Freq:50.00Hz 实检光通:3721.18x1 lm					
灯具名称: 600X600-20W			灯具类型:		灯具重量:
灯具规格:			外型尺寸:		测试编号:
制造厂商:			发光口面:		遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.317	.180	.057	.309	.176	.056	.295	.169	.054	.283	.163	.052	.271	.157	.051	
2.0	.296	.162	.050	.290	.160	.049	.277	.154	.048	.266	.149	.047	.256	.145	.046	
3.0	.273	.145	.044	.268	.143	.043	.257	.139	.042	.247	.135	.041	.237	.131	.041	
4.0	.252	.131	.038	.247	.129	.038	.237	.126	.038	.228	.122	.037	.220	.119	.036	
5.0	.232	.118	.034	.228	.117	.034	.219	.114	.034	.211	.111	.033	.204	.109	.033	
6.0	.215	.108	.031	.211	.107	.031	.204	.104	.030	.196	.102	.030	.190	.100	.030	
7.0	.200	.099	.028	.197	.098	.028	.190	.096	.028	.183	.094	.027	.177	.092	.027	
8.0	.187	.091	.026	.184	.090	.026	.177	.089	.025	.172	.087	.025	.166	.085	.025	
9.0	.175	.085	.024	.172	.084	.024	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.152	.075	.021	.148	.074	.021	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天 花 板 利 用 系 数															
0.0	.198	.198	.198	.169	.169	.169	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.188	.163	.141	.161	.140	.121	.110	.096	.084	.063	.056	.049	.020	.018	.016	
2.0	.180	.139	.105	.154	.120	.091	.106	.083	.063	.061	.048	.037	.020	.016	.012	
3.0	.173	.122	.081	.148	.105	.070	.102	.073	.049	.059	.043	.029	.019	.014	.010	
4.0	.165	.108	.065	.142	.094	.057	.097	.065	.040	.056	.038	.024	.018	.012	.008	
5.0	.157	.098	.054	.135	.085	.047	.093	.059	.033	.054	.035	.020	.017	.011	.007	
6.0	.150	.090	.046	.129	.078	.040	.089	.054	.029	.052	.032	.017	.017	.010	.006	
7.0	.143	.083	.041	.123	.072	.035	.085	.050	.025	.050	.030	.015	.016	.010	.005	
8.0	.137	.077	.036	.118	.067	.031	.082	.047	.022	.047	.028	.013	.015	.009	.004	
9.0	.131	.072	.033	.113	.063	.028	.078	.044	.020	.045	.026	.012	.015	.009	.004	
10.0	.125	.068	.030	.108	.059	.026	.075	.042	.019	.044	.025	.011	.014	.008	.004	

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2023-11-10

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.354
环境湿度: 65.0%
测试距离: 11.227米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:220.0V I:0.1786A P:20.55W PF:0.5229 Freq:50.00Hz 实检光通:3721.18x1 lm										
灯具名称: 600X600-20W					灯具类型:			灯具重量:		
灯具规格:					外型尺寸:			测试编号:		
制造厂商:					发光口面:			遮光角:		
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉(Viewed crosswise)					向前(Viewed endwise)				
x = 2H y = 2H	12.9	14.4	13.2	14.7	14.9	12.9	14.4	13.2	14.7	14.9
3H	14.5	15.9	14.8	16.1	16.4	14.5	15.9	14.8	16.2	16.4
4H	15.1	16.4	15.4	16.7	17.0	15.1	16.5	15.5	16.8	17.0
6H	15.6	16.8	15.9	17.1	17.4	15.6	16.9	16.0	17.2	17.5
8H	15.7	16.9	16.1	17.2	17.6	15.8	17.0	16.2	17.3	17.6
12H	15.8	17.0	16.2	17.3	17.6	15.9	17.1	16.3	17.4	17.7
4H 2H	13.5	14.9	13.9	15.1	15.4	13.5	14.9	13.9	15.2	15.4
3H	15.3	16.4	15.6	16.7	17.1	15.3	16.5	15.7	16.8	17.1
4H	16.0	17.1	16.4	17.4	17.8	16.1	17.2	16.5	17.5	17.8
6H	16.6	17.6	17.0	17.9	18.3	16.7	17.7	17.1	18.0	18.4
8H	16.8	17.7	17.3	18.1	18.5	16.9	17.8	17.4	18.2	18.6
12H	17.0	17.8	17.4	18.2	18.6	17.1	17.9	17.5	18.3	18.7
8H 4H	16.3	17.2	16.7	17.6	18.0	16.4	17.2	16.8	17.6	18.0
6H	17.1	17.8	17.5	18.2	18.7	17.1	17.9	17.6	18.3	18.7
8H	17.4	18.0	17.9	18.5	18.9	17.5	18.1	17.9	18.6	19.0
12H	17.6	18.2	18.1	18.6	19.1	17.7	18.3	18.2	18.7	19.2
12H 4H	16.3	17.1	16.8	17.5	18.0	16.4	17.2	16.8	17.6	18.0
6H	17.1	17.8	17.6	18.2	18.7	17.2	17.9	17.7	18.3	18.8
8H	17.5	18.1	18.0	18.5	19.0	17.6	18.1	18.1	18.6	19.1
不同间隔布灯时,观察者位置引起的UGR变化:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.1 / - 0.3				

依据CIE Pub.117计算, 3721lm光源光通要进行修正($8\log(F/F_0) = 4.6$).

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2023-11-10

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE) GO-2000A_V1系统 V2.0.354
环境湿度: 65.0%
测试距离: 11.227米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:220.0V I:0.1786A P:20.55W PF:0.5229 Freq:50.00Hz 实检光通:3721.18x1 lm		
灯具名称: 600X600-20W	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) $k(RI) \times RCR = 5$									
$k = 0.60$	57	45	38	56	45	38	55	44	38	31
0.80	67	55	47	66	54	47	64	54	47	40
1.00	75	64	56	74	63	56	71	65	55	48
1.25	82	71	64	81	71	64	78	69	63	55
1.50	87	77	70	85	76	69	82	74	68	61
2.00	94	85	79	92	84	78	89	82	76	68
2.50	98	90	84	96	89	83	92	86	81	72
3.00	102	95	89	99	93	88	95	90	85	77
4.00	106	100	95	103	98	94	99	94	91	81
5.00	108	103	99	106	101	97	101	97	94	85
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHRNOM = 1.25			

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2023-11-10

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.354
环境湿度: 65.0%
测试距离: 11.227米 [K=1.0000]
备注:

灯具等光强曲线

实测参数: U:220.0V I:0.1786A P:20.55W PF:0.5229 Freq:50.00Hz 实检光通:3721.18x1 lm		
灯具名称: 600X600-20W	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

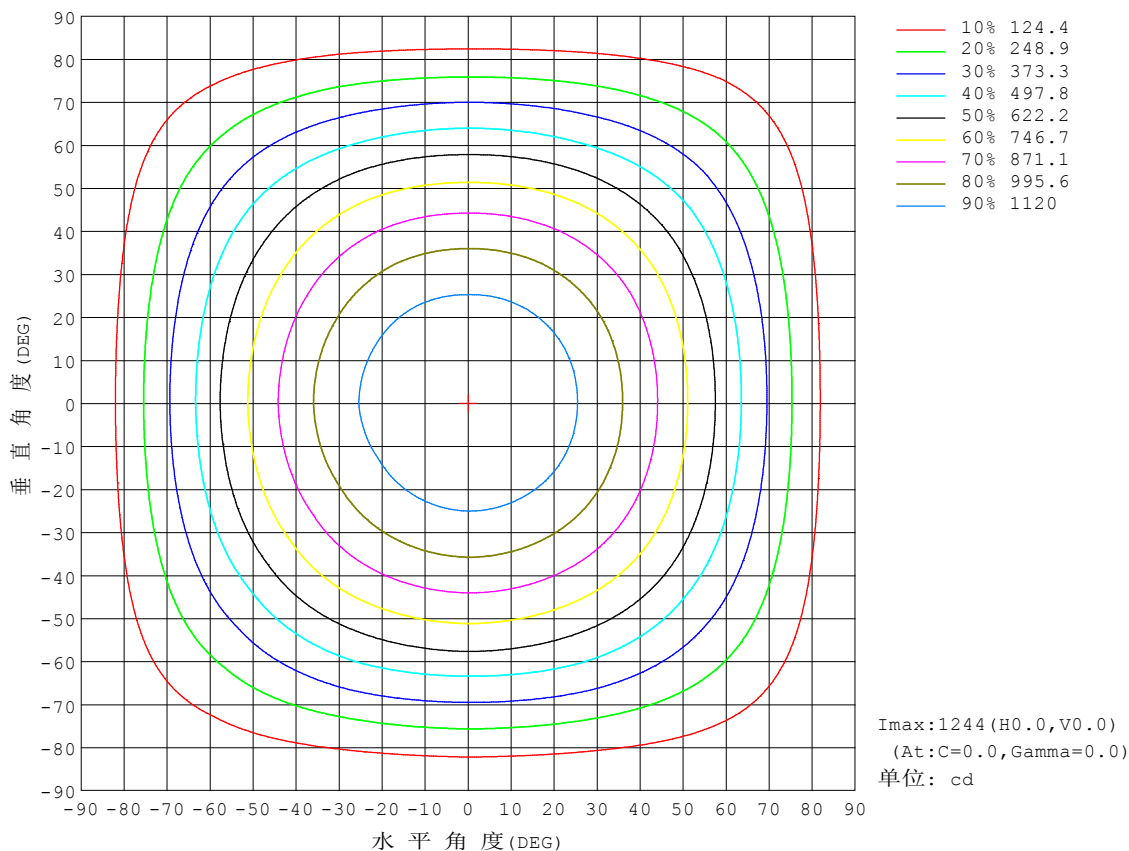


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2023-11-10

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.354
环境湿度: 65.0%
测试距离: 11.227米 [K=1.0000]
备注:

灯 具 有 效 平 均 照 度 图

实测参数: U:220.0V I:0.1786A P:20.55W PF:0.5229 Freq:50.00Hz 实检光通:3721.18x1 lm		
灯具名称: 600X600-20W	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

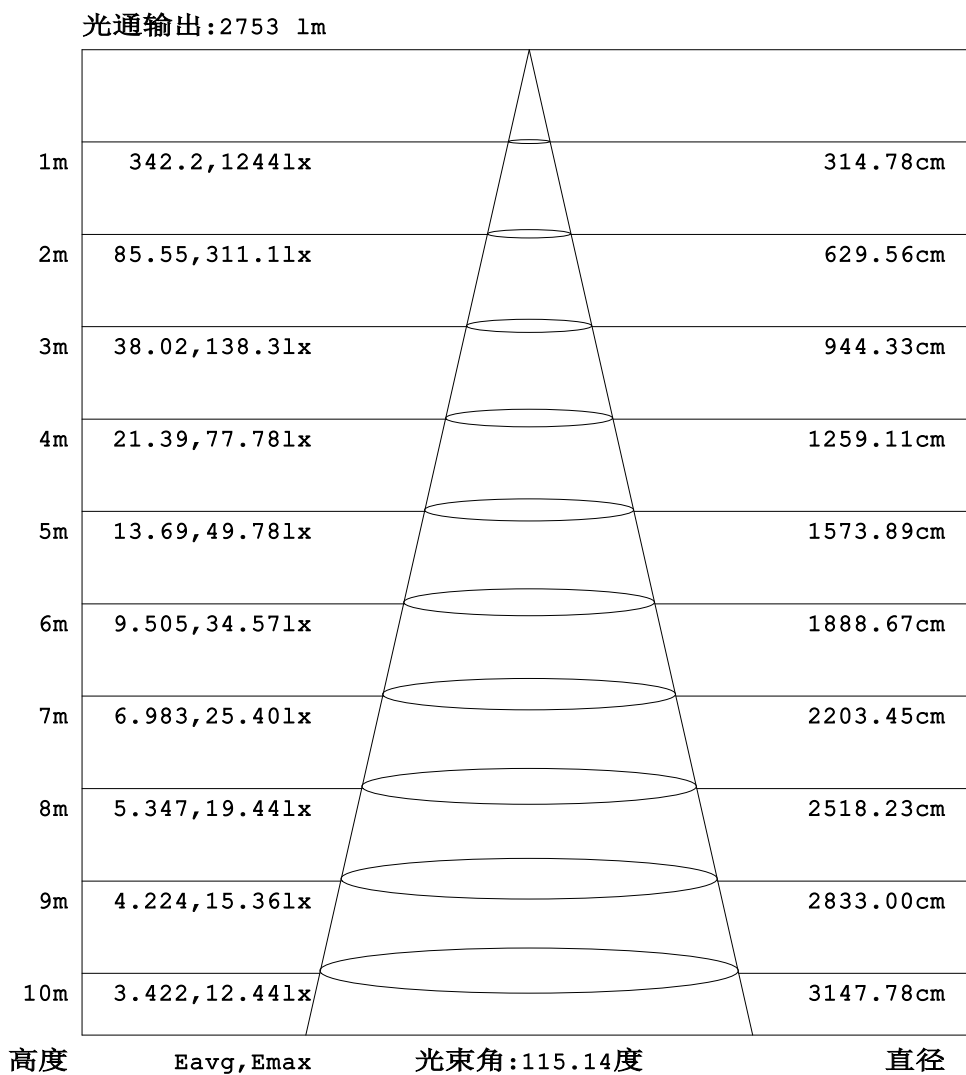


注:曲线为灯具在不同投射距离下的照射区域及区域内平均照度。

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2023-11-10

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.354
环境湿度: 65.0%
测试距离: 11.227米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:220.0V I:0.1786A P:20.55W PF:0.5229 Freq:50.00Hz 实检光通:3721.18x1 lm		
灯具名称: 600X600-20W	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

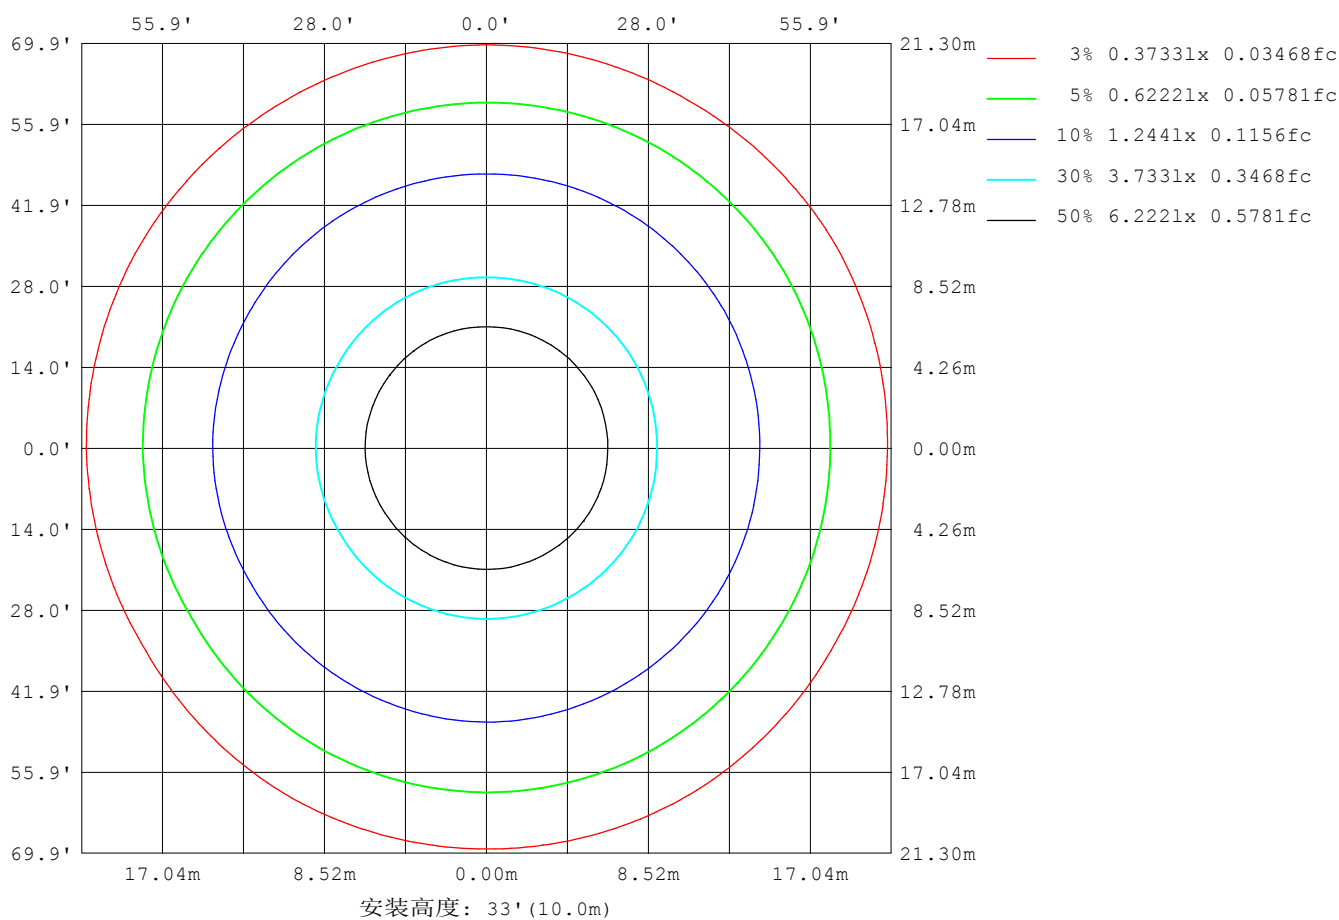

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2023-11-10

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.354
环境湿度: 65.0%
测试距离: 11.227米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:220.0V I:0.1786A P:20.55W PF:0.5229 Freq:50.00Hz 实检光通:3721.18x1 lm		
灯具名称: 600X600-20W	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:


平均亮度	数值 (cd/m2)
L横 (65) av	3575
L横 (75) av	3221
L横 (85) av	2685
L纵 (65) av	3621
L纵 (75) av	3311
L纵 (85) av	2859
L45 (65) av	3585
L45 (75) av	3249
L45 (85) av	2670

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2023-11-10

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.354
环境湿度:65.0%
测试距离:11.227米 [K=1.0000]
备注:

平面照度曲线

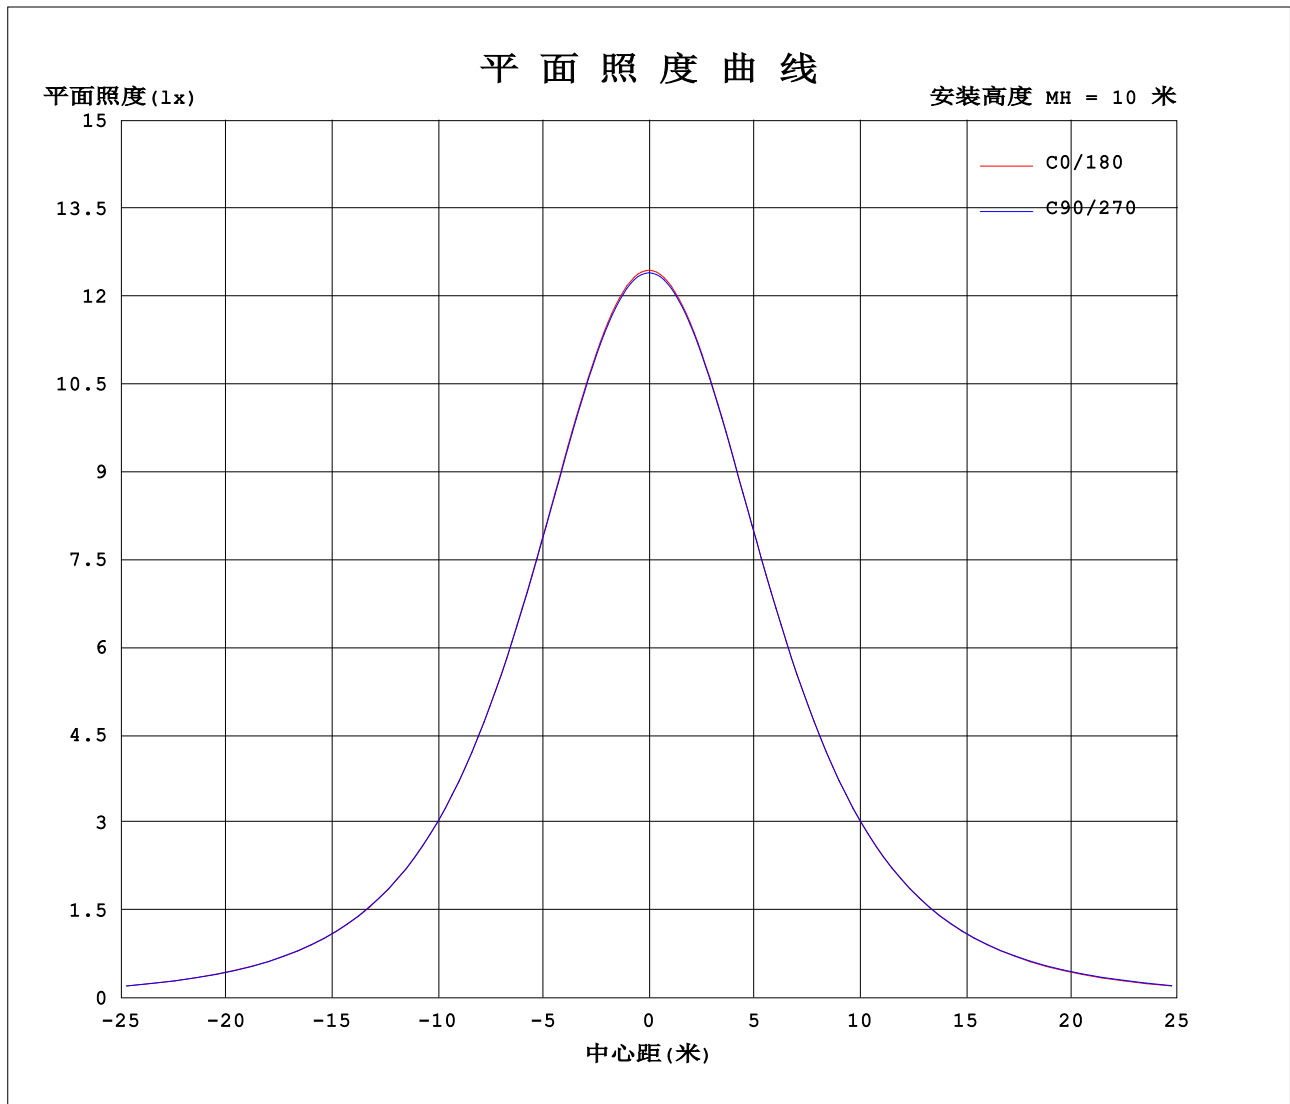

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2023-11-10

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.354
环境湿度: 65.0%
测试距离: 11.227米 [K=1.0000]
备注:

光 强 分 布 数 据 表 格

实测参数: U:220.0V I:0.1786A P:20.55W PF:0.5229 Freq:50.00Hz 实检光通:3721.18x1 lm																	
灯具名称: 600X600-20W									灯具类型:						灯具重量:		
灯具规格:									外型尺寸:						测试编号:		
制造厂商:									发光口面:						遮光角:		

表--1													单位: cd					
C (DEG) γ (DEG)		0	30	60	90	120	150	180	210	240	270	300	330					
0	1244	1243	1241	1240	1240	1239	1244	1243	1241	1240	1240	1239						
5	1240	1238	1236	1236	1234	1233	1240	1238	1237	1236	1236	1236						
10	1226	1224	1222	1221	1219	1218	1225	1223	1223	1222	1222	1223						
15	1202	1200	1198	1198	1195	1193	1201	1199	1200	1198	1200	1200						
20	1168	1167	1164	1164	1161	1158	1168	1166	1167	1166	1168	1168						
25	1125	1124	1121	1121	1117	1114	1124	1122	1124	1123	1126	1126						
30	1071	1071	1068	1068	1063	1060	1071	1069	1072	1070	1074	1075						
35	1008	1008	1005	1006	1000	996	1008	1006	1010	1008	1012	1013						
40	936	936	934	935	929	924	937	935	940	937	941	942						
45	855	856	854	856	849	843	857	855	861	858	863	863						
50	767	768	766	769	760	755	770	767	774	771	775	776						
55	672	673	672	675	666	660	675	672	680	677	682	681						
60	571	573	572	576	567	555	575	572	581	578	583	582						
65	468	461	469	466	464	448	463	470	470	477	472	480						
70	363	358	365	364	360	345	360	365	367	373	369	375						
75	255	257	258	263	253	244	258	257	266	265	269	270						
80	159	160	160	166	155	148	161	160	168	168	171	170						
85	70.8	71.0	69.9	75.6	65.6	60.5	73.3	70.8	77.3	77.9	80.2	80.4						
90	4.30	5.49	4.63	4.88	3.53	2.90	5.59	6.33	8.03	6.10	8.44	9.13						
95	2.37	2.42	2.44	2.40	2.46	2.47	2.45	2.56	2.50	2.47	2.49	2.48						
100	2.98	3.00	3.03	2.98	3.03	3.05	3.09	3.24	3.11	3.12	3.09	3.12						
105	3.60	3.61	3.65	3.62	3.65	3.66	3.75	3.85	3.75	3.78	3.73	3.76						
110	4.20	4.21	4.31	4.24	4.27	4.27	4.40	4.48	4.40	4.44	4.38	4.40						
115	4.78	4.78	4.81	4.83	4.83	4.83	4.99	5.08	5.02	5.03	5.01	4.99						
120	5.36	5.36	5.38	5.39	5.37	5.41	5.60	5.66	5.59	5.66	5.59	5.58						
125	5.94	5.91	5.94	5.96	5.94	5.96	6.20	6.22	6.14	6.22	6.14	6.15						
130	6.46	6.45	6.49	6.48	6.48	6.47	6.75	6.76	6.67	6.78	6.67	6.68						
135	6.94	6.95	6.96	6.96	6.95	6.94	7.24	7.45	7.30	7.26	7.31	7.29						
140	7.46	7.45	7.40	7.45	7.45	7.40	7.70	7.69	7.62	7.70	7.63	7.66						
145	7.91	7.91	7.85	7.90	7.90	7.84	8.14	8.09	8.04	8.12	8.02	8.08						
150	8.33	8.34	8.28	8.33	8.33	8.29	8.50	8.51	8.47	8.49	8.47	8.50						
155	8.79	8.79	8.71	8.74	8.77	8.73	8.94	8.96	8.90	8.91	8.87	8.96						
160	9.21	9.19	9.14	9.16	9.17	9.15	9.40	9.37	9.32	9.31	9.26	9.35						
165	9.63	9.53	9.50	9.52	9.50	9.55	9.79	9.71	9.64	9.66	9.64	9.66						
170	9.89	9.80	9.81	9.80	9.77	9.89	10.1	10.1	9.94	9.96	9.98	9.92						
175	10.1	10.0	10.0	10.0	9.98	10.1	10.2	10.1	10.1	10.1	10.1	10.0						
180	10.2	10.1	10.0	10.1	10.1	10.1	10.2	10.1	10.1	10.1	10.1	10.1						

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2023-11-10

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.354
环境湿度: 65.0%
测试距离: 11.227米 [K=1.0000]
备注:

Photometric Data Table [cd]

G/C	0.0	30.0	60.0	90.0	120.0	150.0	180.0	210.0	240.0	270.0
0.0	1244	1243	1241	1240	1240	1239	1244	1243	1241	1240
3.0	1243	1241	1240	1239	1237	1237	1243	1241	1240	1239
6.0	1238	1236	1234	1233	1232	1231	1237	1235	1235	1234
9.0	1229	1228	1226	1225	1223	1222	1229	1227	1227	1225
12.0	1217	1216	1213	1213	1210	1209	1217	1215	1215	1213
15.0	1202	1200	1198	1198	1195	1193	1201	1199	1200	1198
18.0	1183	1181	1179	1178	1175	1173	1183	1181	1182	1180
21.0	1161	1159	1156	1156	1152	1150	1160	1158	1160	1158
24.0	1134	1133	1130	1130	1126	1124	1133	1132	1133	1132
27.0	1104	1104	1101	1101	1096	1093	1104	1102	1104	1103
30.0	1071	1071	1068	1068	1063	1060	1071	1069	1072	1070
33.0	1034	1034	1031	1032	1026	1023	1034	1032	1036	1034
36.0	994.4	994.4	991.6	992.9	986.6	983.0	995.0	993.2	996.9	994.8
39.0	951.6	951.8	949.2	950.4	943.9	939.3	952.2	950.0	954.7	952.0
42.0	904.6	905.3	902.8	904.4	897.5	892.8	906.0	903.7	908.9	906.1
45.0	855.1	856.0	853.7	855.8	848.5	842.8	857.2	855.1	861.0	858.1
48.0	803.4	803.7	802.3	804.4	796.7	791.1	805.3	802.6	809.0	806.1
51.0	747.5	749.4	746.9	750.6	741.8	736.0	751.2	748.6	754.7	752.7
54.0	691.2	692.1	691.4	694.2	685.7	678.9	694.9	692.2	698.8	696.8
57.0	631.9	633.6	632.4	636.4	627.1	620.5	635.2	632.8	640.1	637.8
60.0	571.2	572.9	572.2	576.4	566.6	555.1	575.3	572.5	581.3	578.4
63.0	509.2	501.9	511.0	506.0	505.3	488.6	505.1	511.6	511.4	518.1
66.0	446.5	440.9	448.8	445.8	443.2	427.8	442.9	448.5	449.8	455.8
69.0	383.3	378.9	385.9	384.2	380.3	365.8	381.0	386.0	387.8	393.7
72.0	320.8	317.1	323.7	322.8	318.4	304.0	318.5	323.6	326.2	331.7
75.0	255.1	256.8	258.0	262.7	252.7	244.1	258.4	257.0	266.2	265.2
78.0	196.2	198.3	198.4	203.9	193.4	185.5	199.0	197.9	206.4	206.2
81.0	140.6	141.4	141.9	146.9	137.0	129.3	142.6	141.7	149.3	149.7
84.0	87.91	88.02	87.66	92.83	83.24	76.90	89.89	87.76	94.79	95.33
87.0	38.98	39.05	36.87	42.92	33.55	30.26	41.89	38.81	44.09	44.66
90.0	4.303	5.494	4.630	4.882	3.533	2.902	5.594	6.335	8.034	6.097
93.0	2.149	2.187	2.222	2.151	2.240	2.251	2.224	2.340	2.278	2.297
96.0	2.483	2.540	2.555	2.504	2.565	2.585	2.585	2.700	2.621	2.610
99.0	2.854	2.883	2.917	2.856	2.926	2.928	2.947	3.071	2.983	3.007
102.0	3.224	3.236	3.287	3.227	3.287	3.281	3.371	3.486	3.380	3.387
105.0	3.603	3.615	3.649	3.624	3.649	3.660	3.751	3.848	3.751	3.776
108.0	3.947	3.976	4.001	4.003	4.001	4.013	4.140	4.218	4.131	4.173
111.0	4.308	4.347	4.363	4.347	4.372	4.374	4.528	4.607	4.528	4.561
114.0	4.661	4.663	4.724	4.708	4.733	4.717	4.880	4.959	4.880	4.932
117.0	5.022	5.006	5.067	5.042	5.049	5.061	5.242	5.311	5.259	5.302
120.0	5.356	5.358	5.384	5.386	5.375	5.413	5.603	5.664	5.594	5.664
123.0	5.727	5.693	5.727	5.729	5.754	5.747	5.973	5.998	5.919	6.016
126.0	6.052	6.018	6.043	6.063	6.052	6.072	6.326	6.342	6.253	6.350
129.0	6.341	6.343	6.350	6.371	6.350	6.379	6.669	6.649	6.570	6.667
132.0	6.621	6.651	6.667	6.677	6.676	6.677	6.967	7.028	6.913	6.974
135.0	6.938	6.949	6.965	6.958	6.947	6.939	7.238	7.453	7.300	7.263
138.0	7.245	7.247	7.227	7.256	7.236	7.211	7.527	7.535	7.473	7.516
141.0	7.525	7.536	7.507	7.545	7.525	7.500	7.798	7.787	7.708	7.787
144.0	7.796	7.816	7.769	7.807	7.805	7.753	8.060	8.031	7.952	8.040
147.0	8.085	8.069	8.022	8.060	8.076	8.015	8.322	8.275	8.223	8.266
150.0	8.329	8.340	8.275	8.331	8.329	8.286	8.503	8.510	8.467	8.492
153.0	8.591	8.602	8.537	8.593	8.609	8.557	8.738	8.772	8.738	8.700
156.0	8.844	8.882	8.799	8.828	8.880	8.828	9.018	9.034	8.982	8.989
159.0	9.124	9.126	9.079	9.072	9.106	9.081	9.316	9.251	9.234	9.215
162.0	9.413	9.325	9.287	9.343	9.350	9.316	9.587	9.486	9.460	9.486
165.0	9.630	9.532	9.504	9.523	9.495	9.550	9.785	9.712	9.641	9.658
168.0	9.802	9.704	9.703	9.704	9.676	9.776	9.957	9.946	9.776	9.811
171.0	9.938	9.839	9.874	9.839	9.802	9.929	10.11	10.11	9.975	9.974
174.0	10.08	9.975	9.983	9.975	9.956	10.02	10.18	10.14	10.04	10.06
177.0	10.14	10.08	10.07	10.06	10.05	10.10	10.16	10.12	10.04	10.06
180.0	10.17	10.10	10.05	10.06	10.06	10.07	10.18	10.11	10.06	10.06
G/C	300.0	330.0								
0.0	1240	1239								
3.0	1238	1238								
6.0	1234	1234								
9.0	1226	1226								
12.0	1215	1215								
15.0	1200	1200								
18.0	1182	1183								
21.0	1160	1161								
24.0	1135	1135								
27.0	1106	1107								
30.0	1074	1075								

C角度范围: 0度 - 360度

C角度间隔: 30.0度

测试速度: 快速

环境温度: 25.3℃

测试人员:

测试日期: 2023-11-10

γ角度范围: 0度 - 180度

γ角度间隔: 1.0度

测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.354

环境湿度: 65.0%

测试距离: 11.227米 [K=1.0000]

备注:

Photometric Data Table [cd]

33.0	1037	1038
36.0	999.2	999.6
39.0	957.2	957.4
42.0	910.6	911.4
45.0	862.8	863.2
48.0	811.1	810.8
51.0	757.7	757.5
54.0	701.9	701.2
57.0	643.1	642.2
60.0	583.2	582.2
63.0	512.9	521.3
66.0	451.9	458.6
69.0	390.4	396.0
72.0	328.6	333.8
75.0	268.6	269.9
78.0	209.2	207.9
81.0	151.9	151.7
84.0	97.54	97.48
87.0	46.83	47.59
90.0	8.436	9.130
93.0	2.278	2.305
96.0	2.594	2.592
99.0	2.965	2.989
102.0	3.362	3.378
105.0	3.733	3.758
108.0	4.113	4.146
111.0	4.501	4.507
114.0	4.880	4.878
117.0	5.259	5.230
120.0	5.594	5.582
123.0	5.928	5.908
126.0	6.253	6.233
129.0	6.570	6.576
132.0	6.922	6.920
135.0	7.310	7.290
138.0	7.473	7.489
141.0	7.726	7.769
144.0	7.951	8.013
147.0	8.213	8.266
150.0	8.467	8.501
153.0	8.711	8.745
156.0	8.954	9.025
159.0	9.198	9.269
162.0	9.442	9.486
165.0	9.641	9.658
168.0	9.822	9.811
171.0	10.03	9.947
174.0	10.10	10.05
177.0	10.09	10.06
180.0	10.07	10.06

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2023-11-10

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.354
环境湿度: 65.0%
测试距离: 11.227米 [K=1.0000]
备注: