


室内灯具光度数据

实测参数: U:220.2V I:0.0889A P:8.356W PF:0.4271 Freq:50.00Hz 实检光通:1571.72x1 lm					
灯具名称: T8铝塑管		灯具类型:		灯具重量:	
灯具规格:		外型尺寸:		测试编号:	
制造厂商:		发光口面:		遮光角:	

光源数据		光度数据				光效: 188.08 lm/W
型号		峰值光强(cd)	500.8	S/MH(C0/180)	1.24	
标称功率(W)		灯具效率(%)	100.0	S/MH(C90/270)	1.20	
额定电源电压(V)	220	总光通量(lm)	1571.7	η UP,DN(C0-180)	4.9,44.3	
额定光通量(lm)	1571.72	CIE分类	半直接	η UP,DN(C180-360)	5.3,45.5	
灯具内光源数(只)	1	上射光通比(%)	10.2	CIBSE SHR NOM	1.25	
实测电源电压(V)	220	下射光通比(%)	89.8	CIBSE SHR MAX	1.35	

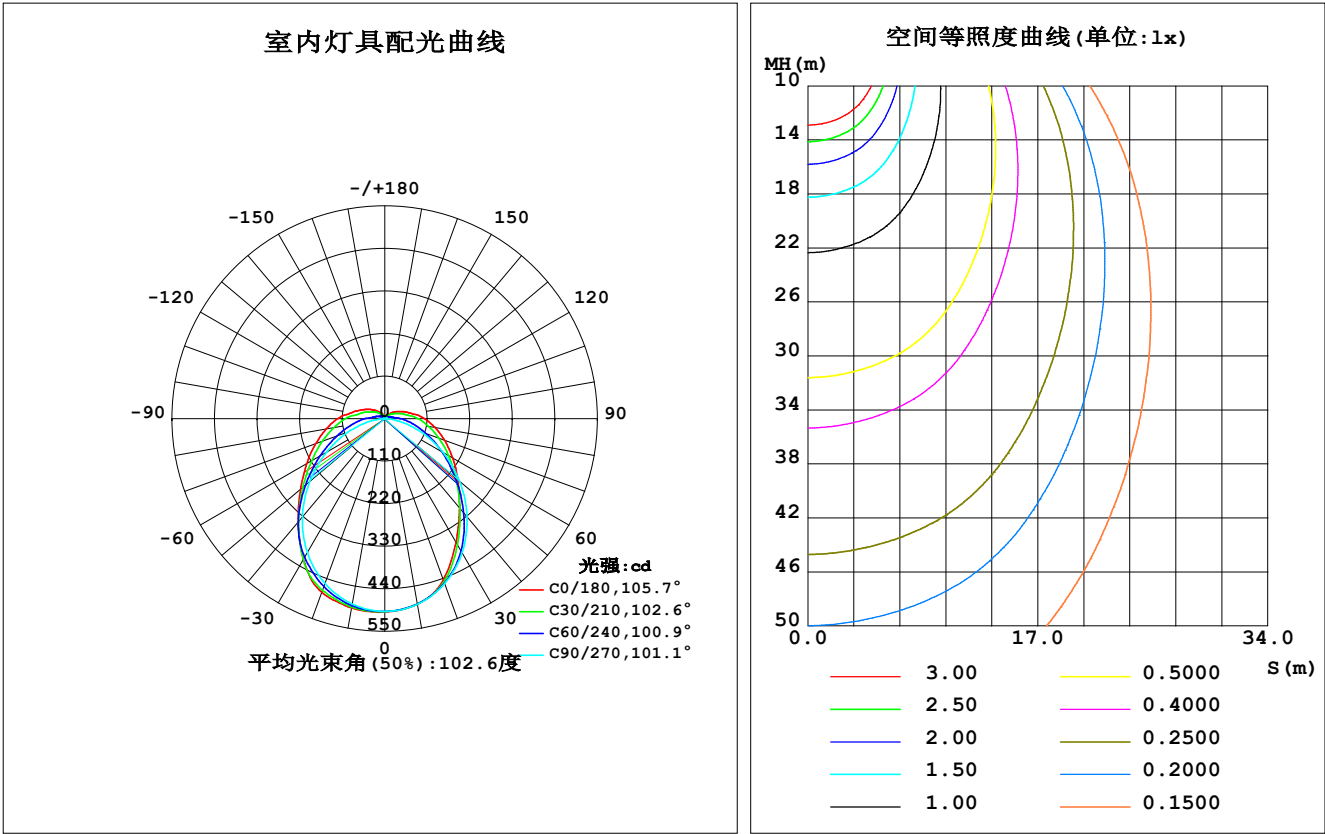

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2024-05-11

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE) GO-2000A_V1系统 V2.0.354
环境湿度: 65.0%
测试距离: 11.227米 [K=1.0000]
备注:

灯具环带光通量

环带光通量：

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ(°)	Φ环	Φ总	%lum, lamp
10	487.2	486.5	487.3	492.0	497.0	492.7	486.7	485.6	0- 10	47.16	47.16	3,3
20	443.3	450.2	453.7	466.1	477.5	467.0	453.2	449.8	10- 20	134.3	181.5	11.5,11.5
30	369.0	385.5	400.1	416.2	421.3	417.9	400.1	386.3	20- 30	198.7	380.1	24.2,24.2
40	301.3	310.1	331.1	345.5	348.6	347.6	331.3	311.4	30- 40	228.2	608.3	38.7,38.7
50	246.9	239.4	253.3	269.7	284.5	272.1	253.8	241.1	40- 50	225.4	833.8	53,53
60	202.5	180.5	173.0	203.8	233.2	205.7	174.7	181.9	50- 60	200.9	1035	65.8,65.8
70	164.9	131.7	97.81	150.0	190.2	151.9	100.4	133.1	60- 70	164.9	1200	76.3,76.3
80	131.9	93.19	33.40	107.5	153.8	109.0	35.55	94.27	70- 80	124.5	1324	84.2,84.2
90	102.7	64.16	0.7863	75.75	122.0	77.02	1.087	65.05	80- 90	87.30	1411	89.8,89.8
100	73.27	40.21	1.175	47.43	88.81	48.60	1.409	40.79	90-100	59.05	1470	93.6,93.6
110	53.43	26.84	1.735	33.73	66.18	34.68	2.014	27.02	100-110	38.93	1509	96,96
120	37.16	17.64	2.205	23.33	48.96	24.12	2.511	17.54	110-120	25.43	1535	97.7,97.7
130	25.05	11.57	2.801	17.14	34.40	17.68	3.080	11.89	120-130	16.33	1551	98.7,98.7
140	14.46	8.319	3.370	11.77	21.06	12.20	3.595	8.666	130-140	9.733	1561	99.3,99.3
150	9.898	5.899	3.858	8.785	14.57	9.104	4.047	5.945	140-150	5.658	1567	99.7,99.7
160	6.662	5.131	4.310	6.509	9.383	6.696	4.364	5.101	150-160	3.155	1570	99.9,99.9
170	5.458	4.883	4.671	5.158	6.177	5.227	4.698	4.865	160-170	1.567	1571	100,100
180	4.933	4.779	4.770	4.725	4.933	4.779	4.761	4.734	170-180	0.4719	1572	100,100
单位:°	光强:cd									单位:lm		

锥面光通量(90度)：723.04 lm

%lum = 46.0%
%lamp = 46.0%

锥面光通量(120度)：1034.7 lm


%lum = 65.8%
%lamp = 65.8%

C角度范围： 0度 - 360度
C角度间隔： 30.0度
测试速度： 快速
环境温度:25.3℃
测试人员：
测试日期:2024-05-11

γ角度范围： 0度 - 180度
γ角度间隔： 1.0度
测试系统： 远方(EVERFINE) GO-2000A_V1系统 V2.0.354
环境湿度:65.0%
测试距离:11.227米 [K=1.0000]
备注：

灯具亮度限制曲线

实测参数: U:220.2V I:0.0889A P:8.356W PF:0.4271 Freq:50.00Hz 实检光通:1571.72x1 lm		
灯具名称: T8铝塑管	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

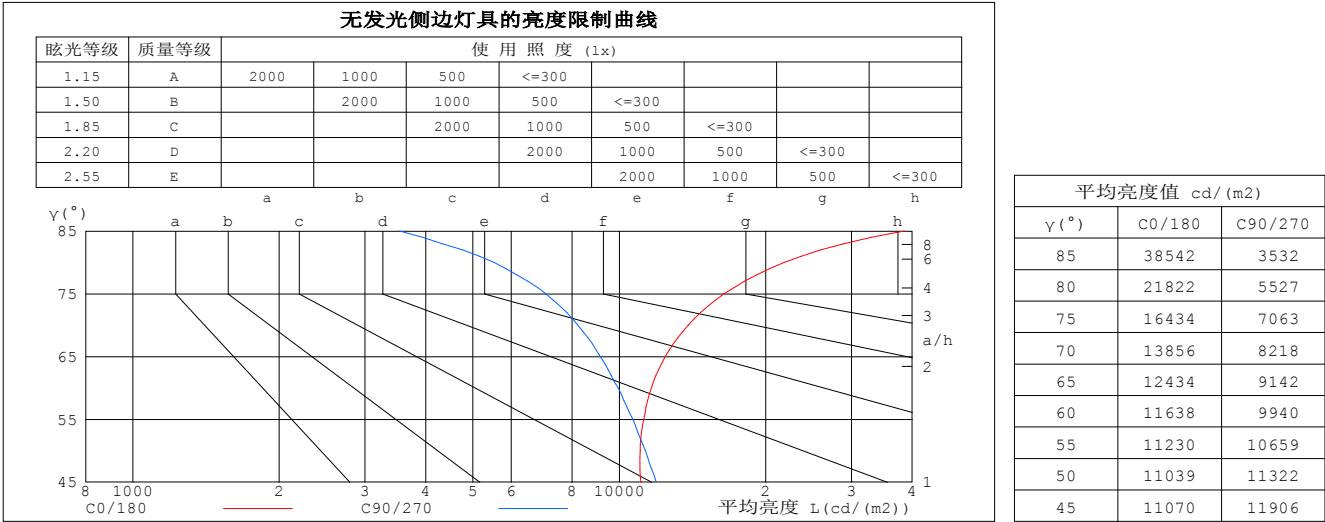


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2024-05-11

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.354
环境湿度: 65.0%
测试距离: 11.227米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:220.2V I:0.0889A P:8.356W PF:0.4271 Freq:50.00Hz 实检光通:1571.72x1 lm		
灯具名称: T8铝塑管	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.17	1.17	1.17	1.13	1.13	1.13	1.05	1.05	1.05	.99	.99	.99	.93	.93	.93	.90
1.0	.99	.95	.90	.96	.92	.88	.90	.86	.83	.84	.81	.79	.79	.77	.75	.72
2.0	.86	.79	.73	.83	.77	.71	.78	.73	.68	.73	.69	.65	.69	.65	.62	.59
3.0	.76	.67	.60	.73	.65	.59	.69	.62	.57	.65	.59	.54	.61	.56	.52	.50
4.0	.67	.58	.51	.65	.57	.50	.61	.54	.48	.57	.51	.47	.54	.49	.45	.42
5.0	.60	.51	.44	.58	.50	.43	.55	.47	.42	.52	.45	.40	.49	.43	.39	.37
6.0	.54	.45	.38	.52	.44	.38	.50	.42	.37	.47	.40	.36	.44	.39	.34	.32
7.0	.49	.40	.34	.48	.39	.33	.45	.38	.33	.43	.36	.32	.41	.35	.31	.29
8.0	.45	.36	.30	.43	.35	.30	.41	.34	.29	.39	.33	.28	.37	.32	.28	.26
9.0	.41	.33	.27	.40	.32	.27	.38	.31	.26	.36	.30	.26	.35	.29	.25	.23
10.0	.38	.30	.25	.37	.29	.24	.35	.29	.24	.34	.28	.23	.32	.27	.23	.21

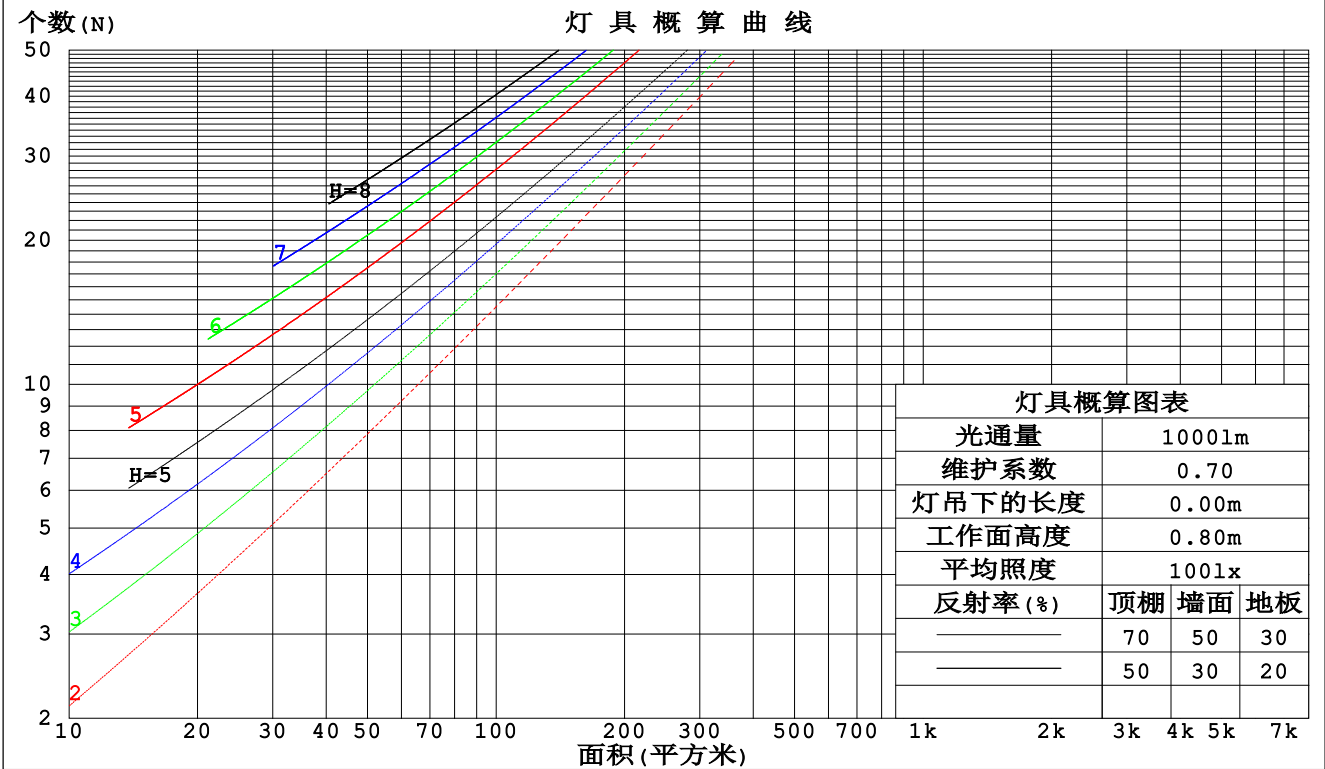

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2024-05-11

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.354
环境湿度: 65.0%
测试距离: 11.227米 [K=1.0000]
备注:

墙面和天花板利用系数

实测参数: U:220.2V I:0.0889A P:8.356W PF:0.4271 Freq:50.00Hz 实检光通:1571.72x1 lm					
灯具名称: T8铝塑管			灯具类型:		灯具重量:
灯具规格:			外型尺寸:		测试编号:
制造厂商:			发光口面:		遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.349	.198	.063	.339	.193	.061	.319	.183	.059	.302	.174	.056	.286	.166	.053	
2.0	.309	.170	.052	.300	.165	.051	.283	.157	.049	.267	.150	.047	.252	.143	.045	
3.0	.279	.148	.044	.271	.145	.044	.255	.138	.042	.241	.132	.040	.228	.126	.039	
4.0	.253	.132	.039	.246	.129	.038	.232	.123	.037	.219	.118	.036	.207	.113	.034	
5.0	.232	.118	.034	.225	.116	.034	.213	.111	.033	.201	.106	.032	.190	.102	.031	
6.0	.214	.107	.031	.208	.105	.030	.197	.101	.029	.186	.097	.028	.176	.093	.028	
7.0	.198	.098	.028	.193	.096	.027	.183	.092	.027	.173	.089	.026	.164	.085	.025	
8.0	.185	.090	.025	.180	.088	.025	.170	.085	.024	.161	.082	.024	.153	.079	.023	
9.0	.173	.083	.023	.168	.082	.023	.160	.079	.022	.151	.076	.022	.144	.073	.021	
10.0	.162	.078	.022	.158	.076	.021	.150	.073	.021	.143	.071	.020	.135	.068	.020	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天花板利用系数															
0.0	.268	.268	.268	.229	.229	.229	.156	.156	.156	.090	.090	.090	.029	.029	.029	
1.0	.261	.234	.210	.224	.201	.180	.153	.138	.125	.088	.080	.073	.028	.026	.023	
2.0	.253	.211	.175	.217	.181	.151	.149	.125	.105	.086	.073	.062	.028	.024	.020	
3.0	.245	.194	.152	.210	.167	.132	.144	.116	.093	.083	.068	.055	.027	.022	.018	
4.0	.238	.181	.137	.204	.156	.119	.140	.109	.084	.081	.064	.050	.026	.021	.016	
5.0	.230	.171	.127	.197	.148	.110	.136	.103	.078	.079	.061	.046	.025	.020	.015	
6.0	.223	.162	.119	.191	.141	.104	.132	.098	.073	.077	.058	.044	.025	.019	.014	
7.0	.216	.156	.114	.185	.135	.099	.128	.095	.070	.074	.056	.042	.024	.018	.014	
8.0	.209	.150	.109	.180	.130	.095	.125	.091	.068	.072	.054	.040	.023	.018	.013	
9.0	.203	.145	.106	.175	.126	.092	.121	.089	.066	.071	.052	.039	.023	.017	.013	
10.0	.197	.141	.103	.170	.122	.090	.118	.086	.064	.069	.051	.038	.022	.017	.013	

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2024-05-11

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.354
环境湿度: 65.0%
测试距离: 11.227米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:220.2V I:0.0889A P:8.356W PF:0.4271 Freq:50.00Hz 实检光通:1571.72x1 lm										
灯具名称: T8铝塑管			灯具类型:			灯具重量:				
灯具规格:			外型尺寸:			测试编号:				
制造厂商:			发光口面:			遮光角:				
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉(Viewed crosswise)					向前(Viewed endwise)				
x = 2H y = 2H	18.7	20.1	19.1	20.5	20.9	18.2	19.6	18.6	20.0	20.4
3H	20.9	22.2	21.4	22.6	23.1	19.5	20.8	20.0	21.2	21.7
4H	22.2	23.4	22.7	23.9	24.3	20.0	21.3	20.5	21.7	22.2
6H	23.6	24.8	24.1	25.2	25.7	20.4	21.5	20.8	22.0	22.5
8H	24.4	25.5	24.9	26.0	26.5	20.4	21.6	20.9	22.0	22.5
12H	25.3	26.4	25.8	26.9	27.4	20.5	21.5	20.9	22.0	22.5
4H 2H	19.3	20.5	19.7	20.9	21.4	18.8	20.1	19.3	20.5	21.0
3H	21.7	22.8	22.2	23.3	23.8	20.4	21.5	20.9	22.0	22.5
4H	23.2	24.2	23.7	24.7	25.2	21.1	22.1	21.6	22.6	23.1
6H	24.8	25.7	25.4	26.2	26.8	21.6	22.5	22.2	23.0	23.6
8H	25.7	26.5	26.3	27.1	27.7	21.8	22.6	22.4	23.2	23.8
12H	26.8	27.5	27.4	28.1	28.7	21.9	22.6	22.5	23.2	23.8
8H 4H	23.5	24.3	24.1	24.9	25.5	21.8	22.6	22.3	23.1	23.7
6H	25.4	26.1	26.0	26.7	27.3	22.6	23.3	23.2	23.9	24.5
8H	26.5	27.2	27.2	27.8	28.4	22.9	23.6	23.5	24.2	24.8
12H	27.9	28.4	28.5	29.0	29.7	23.2	23.7	23.8	24.4	25.1
12H 4H	23.5	24.3	24.1	24.9	25.5	22.0	22.7	22.6	23.3	23.9
6H	25.5	26.2	26.1	26.8	27.4	23.0	23.6	23.6	24.2	24.9
8H	26.8	27.3	27.4	27.9	28.6	23.5	24.0	24.1	24.6	25.3
不同间隔布灯时,观察者位置引起的UGR变化:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.2					+ 0.1 / - 0.2				
2.0H	+ 0.2 / - 0.3					+ 0.1 / - 0.2				

依据CIE Pub.117计算, 1572lm光源光通要进行修正(8log(F/F0) = 1.6)。

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-05-11

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE) GO-2000A_V1系统 V2.0.354
环境湿度:65.0%
测试距离:11.227米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:220.2V I:0.0889A P:8.356W PF:0.4271 Freq:50.00Hz 实检光通:1571.72x1 lm		
灯具名称: T8铝塑管	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) k(RI) x RCR = 5									
k = 0.60	54	42	35	53	42	35	51	41	35	28
0.80	63	51	44	62	51	43	60	49	43	36
1.00	71	59	51	69	58	51	67	59	50	42
1.25	78	66	59	76	65	58	72	63	57	48
1.50	83	72	64	80	70	63	76	68	62	53
2.00	89	80	72	87	78	71	82	75	69	59
2.50	93	84	77	91	83	76	86	79	73	63
3.00	97	89	82	94	87	81	89	83	78	66
4.00	101	94	89	98	92	87	92	87	83	71
5.00	104	98	93	100	95	91	94	90	86	74
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHR _{NOM} = 1.25			

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2024-05-11

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.354
环境湿度: 65.0%
测试距离: 11.227米 [K=1.0000]
备注:

灯具等光强曲线

实测参数: U:220.2V I:0.0889A P:8.356W PF:0.4271 Freq:50.00Hz 实检光通:1571.72x1 lm		
灯具名称: T8铝塑管	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

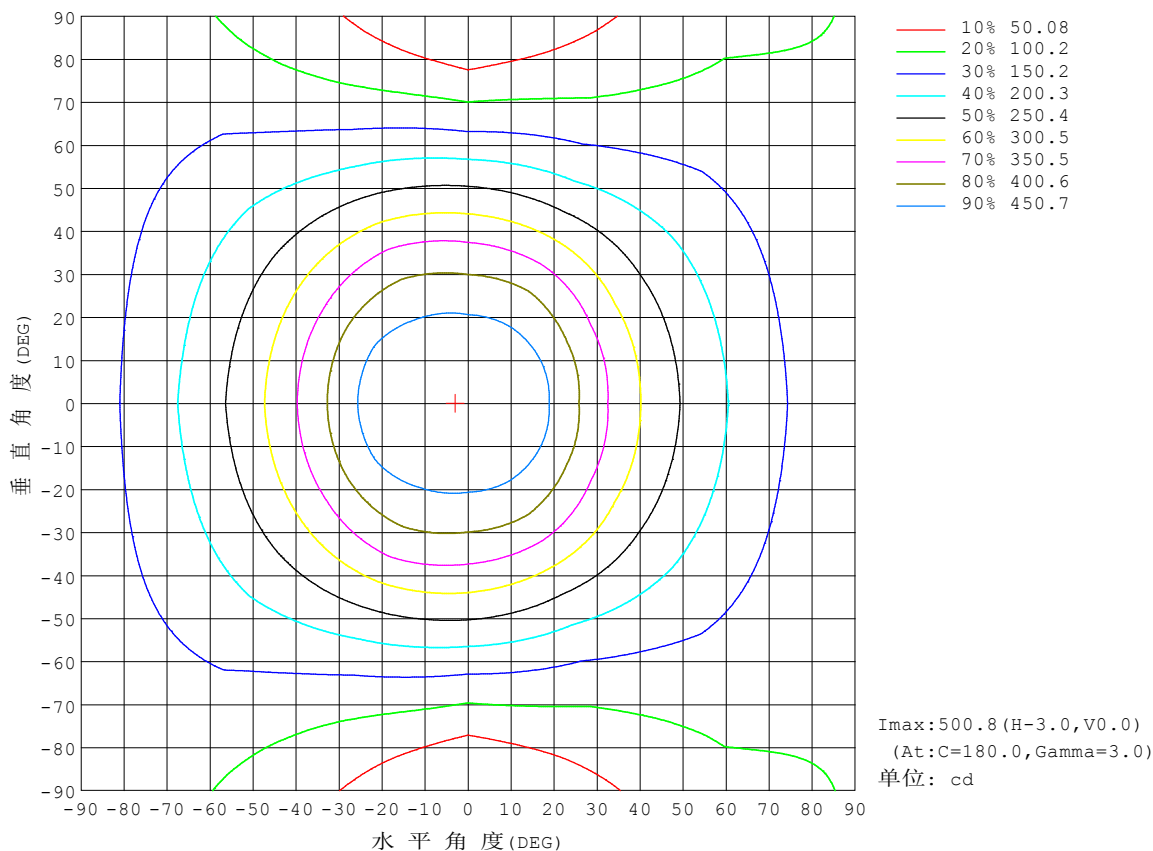


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2024-05-11

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.354
环境湿度: 65.0%
测试距离: 11.227米 [K=1.0000]
备注:

灯 具 有 效 平 均 照 度 图

实测参数: U:220.2V I:0.0889A P:8.356W PF:0.4271 Freq:50.00Hz 实检光通:1571.72x1 lm		
灯具名称: T8铝塑管	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

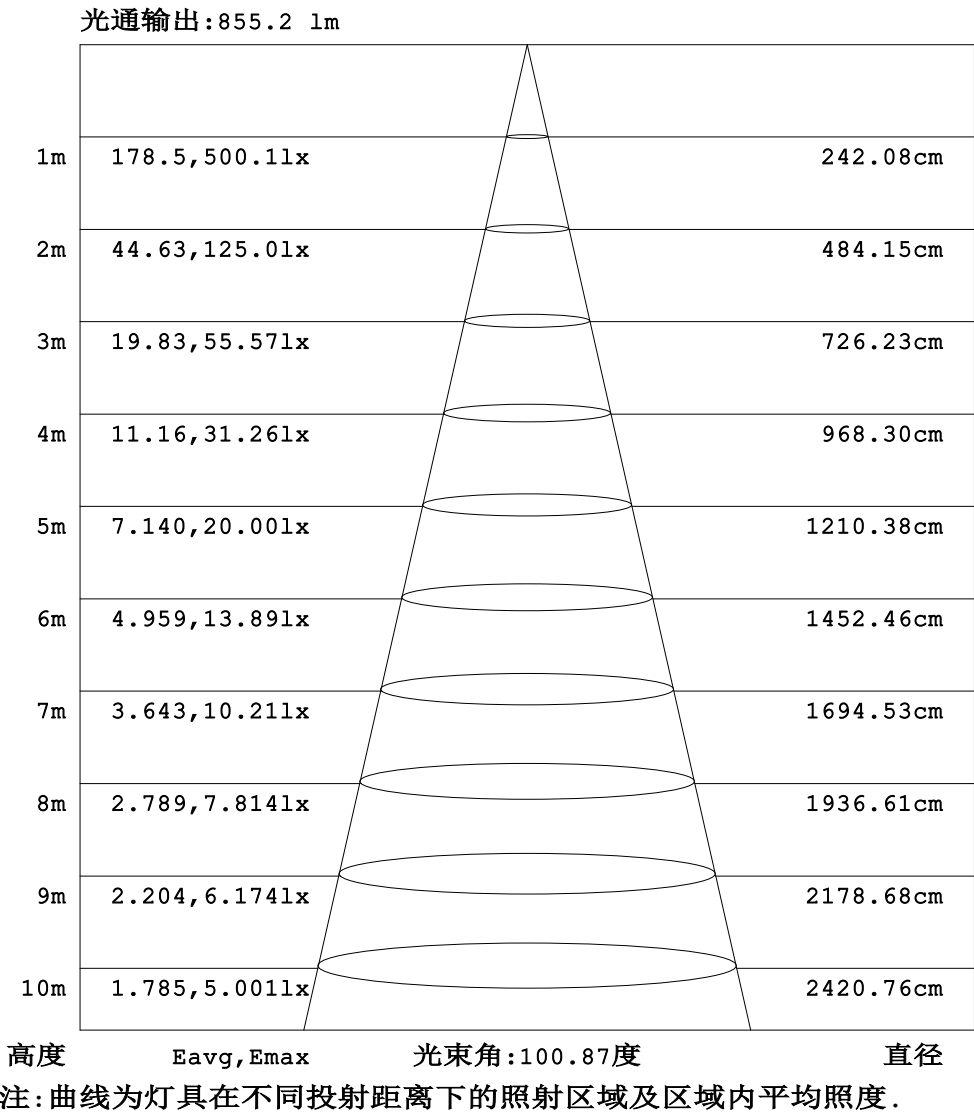


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2024-05-11

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.354
环境湿度: 65.0%
测试距离: 11.227米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:220.2V I:0.0889A P:8.356W PF:0.4271 Freq:50.00Hz 实检光通:1571.72x1 lm		
灯具名称: T8铝塑管	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

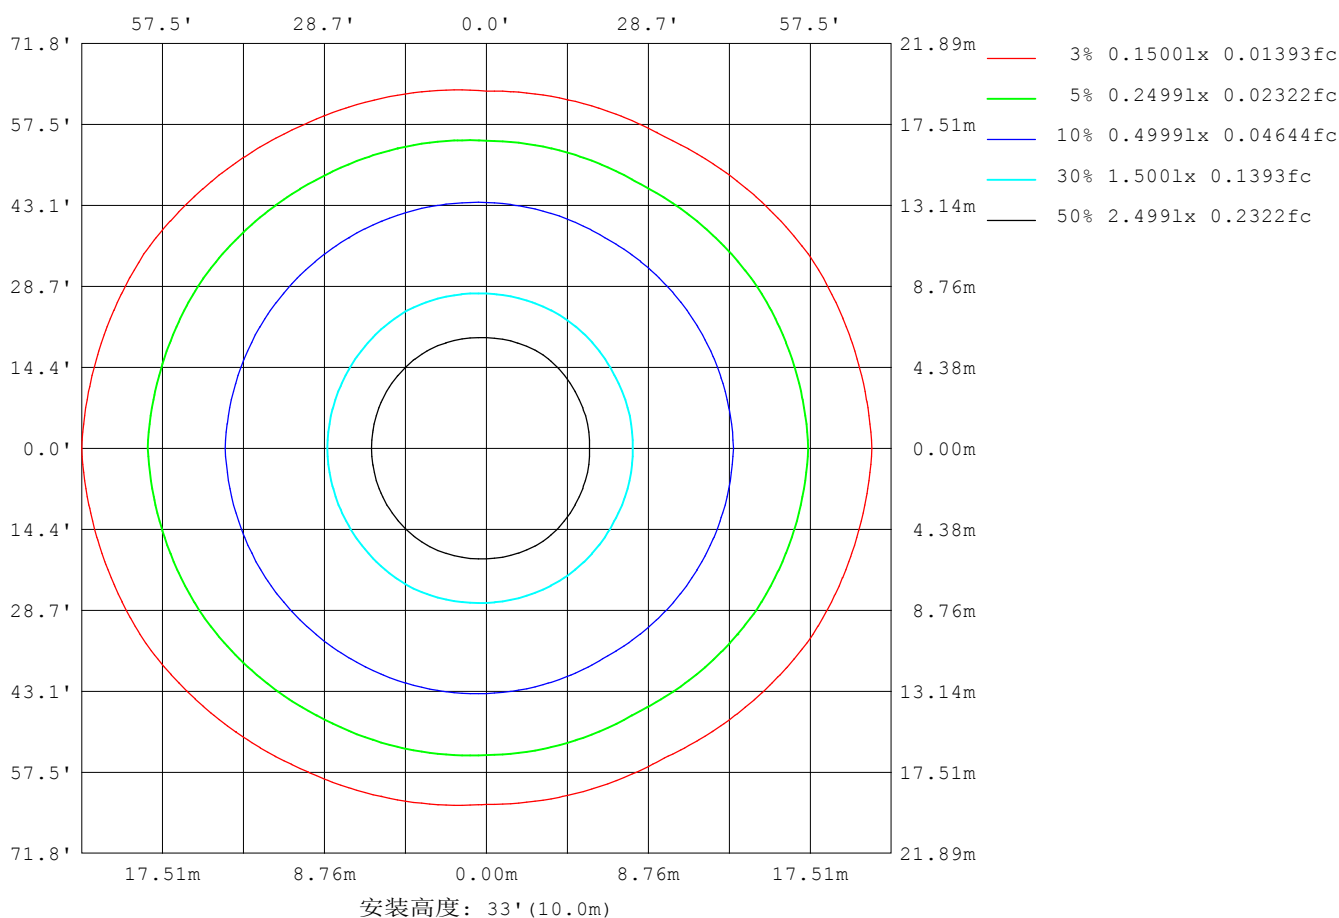

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2024-05-11

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.354
环境湿度: 65.0%
测试距离: 11.227米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:220.2V I:0.0889A P:8.356W PF:0.4271 Freq:50.00Hz 实检光通:1571.72x1 lm		
灯具名称: T8铝塑管	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:


平均亮度	数值 (cd/m2)
L横 (65) av	13390
L横 (75) av	17734
L横 (85) av	41911
L纵 (65) av	9220
L纵 (75) av	7204
L纵 (85) av	3762
L45 (65) av	11280
L45 (75) av	13441
L45 (85) av	28483

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-05-11

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.354
环境湿度:65.0%
测试距离:11.227米 [K=1.0000]
备注:

平面照度曲线

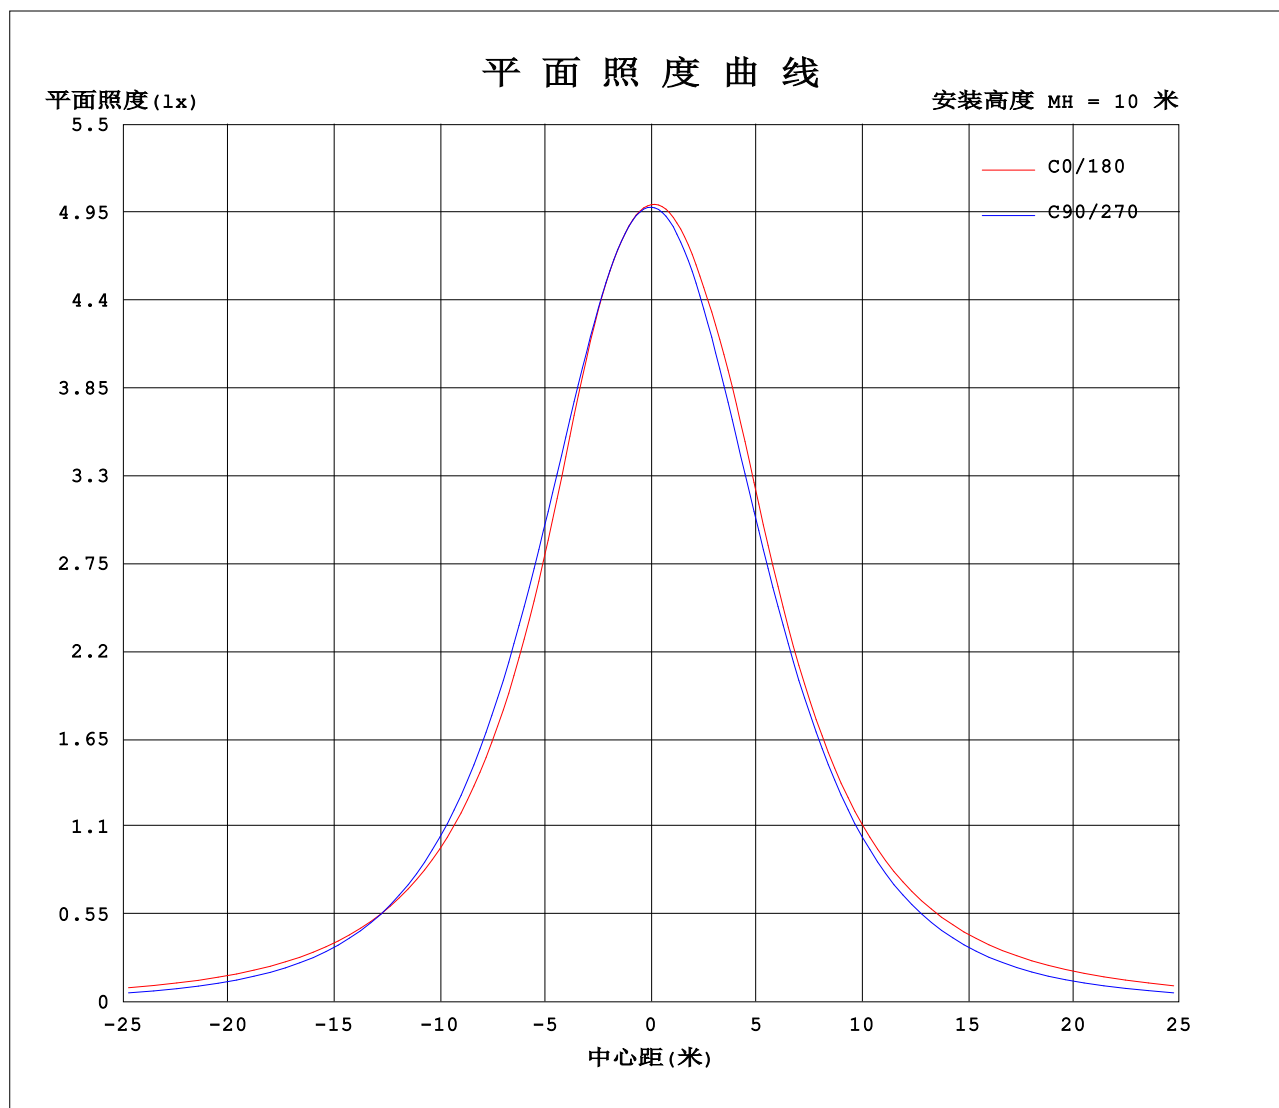

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2024-05-11

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.354
环境湿度: 65.0%
测试距离: 11.227米 [K=1.0000]
备注:

光 强 分 布 数 据 表 格

实测参数: U:220.2V I:0.0889A P:8.356W PF:0.4271 Freq:50.00Hz 实检光通:1571.72x1 lm																	
灯具名称: T8铝塑管									灯具类型:						灯具重量:		
灯具规格:									外型尺寸:						测试编号:		
制造厂商:									发光口面:						遮光角:		

表--1													单位: cd					
γ (DEG)	C (DEG)	0	30	60	90	120	150	180	210	240	270	300	330					
	0	500	499	499	498	498	498	500	499	499	498	498	498					
	5	496	495	495	496	497	498	501	499	497	495	494	494					
	10	487	487	486	487	490	494	497	495	491	487	485	486					
	15	471	472	472	473	478	484	489	485	479	473	471	471					
	20	443	448	452	454	461	471	478	472	462	453	452	448					
	25	407	414	427	429	438	451	455	453	439	429	427	415					
	30	369	376	395	400	413	419	421	421	414	400	396	376					
	35	333	338	358	367	383	382	384	384	384	367	359	339					
	40	301	303	318	331	347	345	349	347	349	331	319	303					
	45	272	270	277	293	305	308	315	310	308	293	279	271					
	50	247	240	238	253	265	275	285	277	268	254	241	241					
	55	224	214	203	213	226	244	257	246	229	214	205	215					
	60	203	191	170	173	191	217	233	219	193	175	172	192					
	65	183	169	141	134	158	192	211	194	160	137	143	170					
	70	165	149	114	97.8	129	171	190	172	132	100	116	150					
	75	148	131	91.1	63.6	104	151	171	152	106	66.2	93.0	132					
	80	132	115	71.5	33.4	82.5	132	154	134	84.4	35.6	73.1	115					
	85	117	99.8	55.1	10.7	64.6	116	137	117	66.4	12.1	56.5	100					
	90	103	86.2	42.1	0.79	50.3	101	122	102	51.7	1.09	43.2	86.9					
	95	89.8	74.1	29.3	0.97	33.6	83.8	106	85.6	34.9	1.11	30.4	74.8					
	100	73.3	58.1	22.3	1.18	26.3	68.6	88.8	69.6	27.6	1.41	22.7	58.9					
	105	62.7	48.8	17.2	1.46	23.0	58.6	77.2	60.6	23.6	1.69	16.5	49.4					
	110	53.4	40.3	13.4	1.73	17.2	50.3	66.2	51.4	17.9	2.01	13.5	40.6					
	115	44.6	32.1	10.6	2.02	14.6	40.8	56.9	42.0	15.1	2.28	10.9	32.2					
	120	37.2	26.8	8.44	2.20	12.3	34.4	49.0	35.2	13.1	2.51	8.38	26.7					
	125	30.5	22.2	7.41	2.49	10.4	29.5	41.2	30.1	10.9	2.80	7.04	22.3					
	130	25.0	16.9	6.23	2.80	9.41	24.9	34.4	25.5	9.85	3.08	6.18	17.6					
	135	18.7	13.3	5.84	3.09	8.41	19.1	27.9	20.1	8.90	3.34	5.73	14.6					
	140	14.5	11.2	5.41	3.37	7.62	15.9	21.1	16.4	7.95	3.60	5.37	12.0					
	145	12.3	9.12	5.02	3.61	6.90	13.7	17.5	14.1	7.19	3.80	5.13	8.75					
	150	9.90	7.06	4.74	3.86	6.32	11.3	14.6	11.7	6.53	4.05	4.80	7.09					
	155	8.25	6.30	4.72	4.07	5.79	9.30	11.7	9.64	5.96	4.18	4.67	6.44					
	160	6.66	5.60	4.66	4.31	5.35	7.67	9.38	7.94	5.46	4.36	4.66	5.54					
	165	5.93	5.19	4.67	4.51	5.09	6.38	7.55	6.58	5.18	4.58	4.66	5.13					
	170	5.46	5.01	4.75	4.67	4.85	5.46	6.18	5.56	4.90	4.70	4.76	4.97					
	175	5.04	4.85	4.71	4.71	4.68	4.82	5.14	5.00	4.81	4.79	4.80	4.87					
	180	4.93	4.81	4.75	4.77	4.72	4.73	4.93	4.81	4.75	4.76	4.73	4.74					

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2024-05-11

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.354
环境湿度: 65.0%
测试距离: 11.227米 [K=1.0000]
备注:

Photometric Data Table [cd]

G/C	0.0	30.0	60.0	90.0	120.0	150.0	180.0	210.0	240.0	270.0
0.0	499.9	499.2	498.6	498.3	498.2	498.1	499.9	499.2	498.6	498.3
3.0	498.1	497.4	497.2	497.4	498.1	498.7	500.8	499.7	498.4	497.2
6.0	494.5	494.0	493.8	494.4	496.0	497.6	500.1	498.6	496.4	494.1
9.0	489.4	488.8	488.5	489.4	492.0	495.0	498.1	495.8	492.3	488.7
12.0	481.9	481.6	481.2	482.3	486.2	490.2	493.9	491.2	486.5	481.6
15.0	471.1	472.1	471.9	473.2	478.3	483.5	488.7	484.6	478.9	472.6
18.0	455.7	459.1	460.6	462.1	468.9	476.8	483.0	477.5	469.3	461.5
21.0	436.1	442.0	447.6	449.1	456.8	468.0	474.4	469.0	457.8	449.0
24.0	414.1	421.6	432.1	434.4	443.2	456.3	460.9	457.2	444.1	434.3
27.0	391.2	399.1	414.7	418.1	428.9	440.0	441.7	441.7	429.7	418.0
30.0	369.0	376.0	395.1	400.1	413.1	419.3	421.3	421.4	414.4	400.1
33.0	347.0	353.0	372.8	381.0	395.4	397.5	398.6	399.4	397.0	381.1
36.0	326.7	331.0	349.6	360.2	375.8	374.8	376.8	376.7	377.5	360.3
39.0	307.2	309.4	325.4	338.4	354.3	351.8	355.7	353.9	356.2	338.6
42.0	289.1	288.9	301.0	316.1	330.3	329.9	334.5	331.8	332.7	316.4
45.0	272.4	270.0	277.3	293.0	305.3	308.3	315.0	310.3	308.2	293.2
48.0	256.6	251.6	253.7	268.8	281.0	287.5	296.4	289.4	283.4	269.3
51.0	241.9	234.7	230.8	244.8	256.8	268.2	278.9	270.5	259.9	246.0
54.0	228.4	219.2	209.5	223.8	233.8	250.0	262.7	251.7	236.1	221.6
57.0	215.2	204.3	189.2	196.4	211.7	232.7	247.4	234.7	214.8	197.9
60.0	202.5	190.7	170.2	173.0	190.5	217.0	233.2	218.6	192.9	174.7
63.0	190.4	177.5	152.0	149.6	170.7	202.0	219.8	203.6	173.4	151.3
66.0	179.1	164.8	135.0	126.9	152.2	187.9	206.6	189.7	154.7	129.2
69.0	168.4	153.0	119.3	105.1	134.8	174.9	194.2	176.4	137.2	107.2
72.0	158.0	141.7	104.6	83.94	118.8	162.6	182.4	164.0	121.1	85.97
75.0	148.0	131.3	91.13	63.61	104.2	150.7	171.4	152.0	106.4	66.16
78.0	138.2	121.2	78.86	44.65	90.53	139.4	160.6	140.9	92.64	47.04
81.0	128.7	111.7	67.99	28.11	78.76	129.0	150.2	130.1	80.46	30.02
84.0	119.7	102.6	58.02	14.35	67.84	119.1	140.6	120.4	69.82	16.17
87.0	111.1	94.13	49.41	4.900	58.45	109.8	130.9	110.9	59.97	6.005
90.0	102.7	86.19	42.14	0.7863	50.29	101.2	122.0	102.3	51.74	1.087
93.0	94.93	78.74	35.82	0.8677	40.02	92.78	113.4	94.15	42.87	1.012
96.0	87.29	71.11	26.96	1.003	32.18	79.10	100.8	80.45	33.01	1.165
99.0	76.28	60.43	23.03	1.139	27.85	70.60	91.28	71.68	29.58	1.327
102.0	68.95	53.99	19.51	1.302	25.29	64.95	84.18	66.00	25.13	1.508
105.0	62.73	48.80	17.22	1.464	23.00	58.62	77.22	60.59	23.61	1.689
108.0	57.06	44.31	15.35	1.618	19.50	52.99	70.31	54.59	20.38	1.861
111.0	51.57	38.23	12.61	1.771	16.38	48.88	64.31	50.07	16.93	2.042
114.0	46.19	33.32	11.18	1.979	14.95	42.80	58.63	43.83	15.38	2.231
117.0	41.50	29.44	9.320	2.060	13.86	38.01	54.06	38.87	14.48	2.322
120.0	37.16	26.84	8.441	2.205	12.28	34.38	48.96	35.17	13.08	2.511
123.0	33.00	24.02	7.807	2.377	11.13	31.34	44.24	31.95	11.59	2.701
126.0	29.39	21.31	7.319	2.557	10.37	28.61	39.74	29.20	10.77	2.855
129.0	26.16	18.15	6.183	2.756	9.616	25.87	35.68	26.45	10.08	3.017
132.0	22.53	14.45	6.153	2.919	9.001	22.62	31.84	23.40	9.404	3.162
135.0	18.69	13.30	5.837	3.090	8.413	19.12	27.95	20.09	8.897	3.342
138.0	15.32	11.67	5.539	3.253	7.925	16.94	23.85	17.60	8.283	3.496
141.0	13.93	10.68	5.332	3.424	7.456	15.70	20.16	15.99	7.786	3.623
144.0	12.73	9.493	5.078	3.578	7.040	14.18	18.17	14.68	7.335	3.767
147.0	11.23	8.283	4.817	3.696	6.642	12.66	16.52	13.10	6.910	3.885
150.0	9.898	7.055	4.743	3.858	6.317	11.25	14.57	11.68	6.531	4.047
153.0	8.867	6.720	4.743	3.976	6.009	10.03	12.81	10.40	6.188	4.137
156.0	7.793	6.061	4.707	4.129	5.711	8.960	11.25	9.273	5.889	4.210
159.0	6.994	5.655	4.671	4.247	5.421	7.966	9.807	8.260	5.520	4.327
162.0	6.194	5.429	4.653	4.400	5.223	7.117	8.606	7.393	5.321	4.463
165.0	5.929	5.195	4.671	4.509	5.087	6.377	7.550	6.580	5.176	4.580
168.0	5.612	5.077	4.725	4.599	4.933	5.763	6.692	5.874	4.987	4.662
171.0	5.394	5.005	4.752	4.698	4.825	5.329	5.951	5.431	4.879	4.725
174.0	5.088	4.870	4.725	4.707	4.735	4.914	5.221	5.088	4.860	4.788
177.0	4.934	4.770	4.698	4.734	4.662	4.716	5.050	4.897	4.770	4.788
180.0	4.933	4.807	4.752	4.770	4.716	4.734	4.933	4.807	4.752	4.761
G/C	300.0	330.0								
0.0	498.2	498.1								
3.0	496.6	496.3								
6.0	493.0	492.8								
9.0	487.7	487.8								
12.0	480.3	480.8								
15.0	471.2	471.3								
18.0	460.3	458.7								
21.0	447.3	441.9								
24.0	432.5	422.0								
27.0	415.5	399.7								
30.0	396.2	376.4								

C角度范围: 0度 - 360度

C角度间隔: 30.0度

测试速度: 快速

环境温度: 25.3℃

测试人员:

测试日期: 2024-05-11

γ角度范围: 0度 - 180度

γ角度间隔: 1.0度

测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.354

环境湿度: 65.0%

测试距离: 11.227米 [K=1.0000]

备注:

Photometric Data Table [cd]

33.0	375.0	353.9
36.0	351.1	331.7
39.0	327.8	310.3
42.0	303.3	290.0
45.0	279.2	270.8
48.0	256.0	252.6
51.0	233.5	235.9
54.0	212.0	220.2
57.0	191.5	205.3
60.0	172.3	191.6
63.0	154.3	178.6
66.0	137.0	165.9
69.0	121.4	153.9
72.0	106.6	142.7
75.0	92.97	132.0
78.0	80.77	122.0
81.0	69.39	112.4
84.0	59.67	103.2
87.0	50.57	94.77
90.0	43.22	86.88
93.0	36.92	79.43
96.0	27.85	72.21
99.0	23.49	61.28
102.0	20.49	54.65
105.0	16.47	49.41
108.0	15.21	42.19
111.0	12.61	38.43
114.0	11.28	33.58
117.0	9.879	29.49
120.0	8.380	26.71
123.0	7.961	23.88
126.0	7.116	21.39
129.0	6.403	18.71
132.0	5.685	16.02
135.0	5.727	14.59
138.0	5.492	13.14
141.0	5.284	11.45
144.0	5.150	9.375
147.0	4.995	7.432
150.0	4.797	7.094
153.0	4.716	6.786
156.0	4.680	6.227
159.0	4.689	5.657
162.0	4.662	5.350
165.0	4.662	5.133
168.0	4.716	4.996
171.0	4.771	4.951
174.0	4.806	4.888
177.0	4.743	4.825
180.0	4.725	4.743

C角度范围: 0度 - 360度

C角度间隔: 30.0度

测试速度: 快速

环境温度: 25.3℃

测试人员:

测试日期: 2024-05-11

γ角度范围: 0度 - 180度

γ角度间隔: 1.0度

测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.354

环境湿度: 65.0%

测试距离: 11.227米 [K=1.0000]

备注: